

THROUGH-HOLE AXIAL CONFORMAL COATED INDUCTORS


LGA0612 SERIES

FEATURES:

- Magnetic Core
- Wire-wound construction
- Heat resistant epoxy resin
- High reliability、Ideal for automatic insertion
- Small size 、Low Cost

COMMON APPLICATIONS:

- VCRs
- Automotive Systems
- Computer Peripheral Equipment
- Televisions
- Electronic Games
- Mobile Communications Equipment
- General Electronic Applications




STANDARD SPECIFICATIONS

Part Number	L (μH)	Tol ± %	Q min	L Test Freq (MHz)	S.R.F (MHz)	R _{DC} (Ω) Max	I _{DC} (mA)
LGA0612-471K	470	10	50	0.796	2.00	1.90	340
LGA0612-561K	560	10	50	0.796	1.7	2.05	310
LGA0612-681K	680	10	50	0.796	1.6	2.30	280
LGA0612-821K	820	10	50	0.796	1.3	2.94	260
LGA0612-102K	1000	10	50	0.796	1.0	3.85	230
LGA0612-122K	1200	10	50	0.252	0.90	5.70	210
LGA0612-152K	1500	10	50	0.252	0.80	6.75	200
LGA0612-182K	1800	10	50	0.252	0.70	7.55	160
LGA0612-222K	2200	10	50	0.252	0.65	8.74	130
LGA0612-272K	2700	10	50	0.252	0.60	11.4	90
LGA0612-332K	3300	10	50	0.252	0.58	13.1	86
LGA0612-392K	3900	10	50	0.252	0.55	17.4	82
LGA0612-472K	4700	10	50	0.252	0.50	24.8	80
LGA0612-562K	5600	10	50	0.252	0.45	26.8	76
LGA0612-682K	6800	10	50	0.252	0.41	31.6	72
LGA0612-822K	8200	10	40	0.252	0.35	40.8	70
LGA0612-103K	10000	10	40	0.252	0.30	45.3	60

Note: 1. K= ± 10%, M= ± 20%

PHYSICAL CHARACTERISTICS

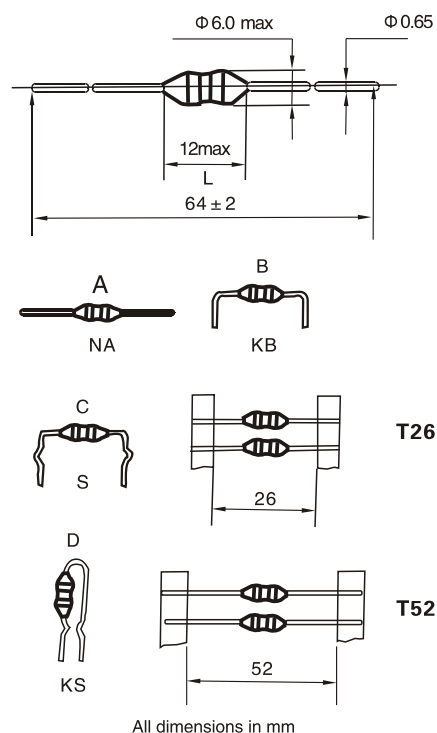

All dimensions in mm

TECHNICAL INFORMATION:

1、Ordering Code

LGA 04 10 KB - 101 K T52
(1) (2) (3) (4) (5) (6) (7)

- (1) Type
 - (2) Outside
 - (3) Body Length
 - (4) Formed Type
 - (5) Nominal Inductance
 - (6) Inductance Tolerance
 - (7) Tape Type
- Testing: (Equivalent acceptable)
Inductance—HP 4285A
RDC: QuadTech 1880 Milliohm meter
Q—HP 4342A
SRF—HP 4191A
 - IDC Max: The maximum DC value having inductance decrease within 10% and temperature increase within 20°C by the application of DC Bias
 - Operating temperature: -25°C to +105°C
 - Storage temperature: -40°C to +85°C
 - Solderability: Temperature @ 230°C ± 5°C for 2 seconds
 - Marking: EIA 4 band color code.

Note: All specifications subject to change without notice.